

Impact of Laser Beam Divergence on Power Design of Free Space Optics Communication Systems

Boncho Bonev¹

Abstract – In this paper the expression for the minimum divergence of the laser beam that satisfies power design of free space laser communication systems for given Bit-Error Rate and statistic of laser beam fluctuations is obtained. It is based on the modelling descriptions of the current laser beam expansion. This expression is used for numerical simulation of influence of laser beam divergence on possible solution of power design problem.

Keywords – Free Space Optics, Power design, Mechanical vibrations, Atmospheric turbulence.

I. INTRODUCTION

Free space optics (FSO) systems have been becoming subject of great interest in the last years [1-6], because they are an alternative of fiber optics and their technical and economical parameters most fully correspond to the requirements resulting from the growing significance of the communication networks. But operation of FSO systems is associated with a number of difficulties [1-4] – influence of atmospheric transparency, atmospheric turbulence and mechanical vibrations of the antennas. The last two caused fluctuations of laser beam propagation direction and this leads to random changes of the optical flux falling on the receiving aperture and increasing the Bit-Error-Rate (BER) of communication system. In previous works the effect of these random factors on FSO power design was studied [6-9] and an algorithm for power design of FSO was suggested [10]. The presence of domain of power design problem [10] demands analysis of the parameters of FSO system that affect it. One of these parameters is laser beam divergence.

The aim of this paper is on the base of the domain of the power design problem described in [10] to obtain an expression of minimum laser beam divergence angle. Numerical analysis of its impact on power design of FSO is also performed.

II. THEORETICAL ANALYSIS

Obtaining the relations for the minimum divergence of the laser beam is based on the algorithm for power design of FSO presented in [10] where a simplified model of mechanical vibrations and atmospheric turbulence is used.

FSO system (Fig. 1) is considered, which consists of a laser

source generating a Gaussian laser beam with initial radius r_0 , pulse-code modulator (PCM), optical transmission antenna (TA) with transparency τ_1 , optical reception antenna (RA) with radius R_2 and transparency τ_2 and photodetector (PhD).

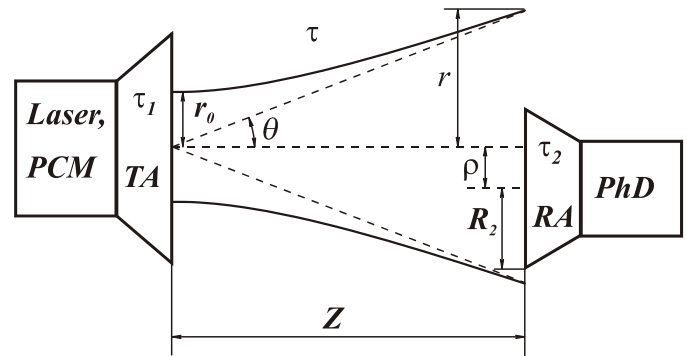


Fig. 1. FSO system

Let Z is the length of the atmospheric communication channel, τ – its transparency, and r is the radius of the laser beam in the receiver's aperture plane.

The domain of power design problem is described by expression [10]

$$1 - 8 \frac{\sigma_\psi^2}{\langle \psi \rangle^2} [\text{erfcinv}(2 \text{BER})]^2 > 0, \quad (1)$$

where $X = \text{erfcinv}(Y)$ is the inverse function of $Y = \text{erfc}(X)$ and function ψ describes the surface density of a Gaussian laser beam in a plane perpendicular to the direction of propagation –

$$\psi = \exp\left(-2 \frac{\rho^2}{r^2}\right) \quad (2)$$

ρ is the linear misalignment between the centre of receiving antenna and the laser beam axis, caused by atmospheric turbulence and mechanical vibrations of antennas (Fig. 1).

The average value and the variances of this function are given with the relations [6-7]

$$\langle \psi \rangle = \frac{1}{\sqrt{1 + \frac{4 \cdot \sigma_\rho^2}{r^2}}}, \quad (3)$$

$$\sigma_\psi^2 = \frac{1}{\sqrt{1 + \frac{8 \cdot \sigma_\rho^2}{r^2}}} - \langle \psi \rangle^2. \quad (4)$$

¹Boncho Bonev is with the Faculty of Telecommunications at Technical University of Sofia, 8 Kl. Ohridski Blvd, Sofia 1000, Bulgaria, E-mail: bbonev@tu-sofia.bg.

In Eqs. (3) and (4) σ_p^2 are the variances of the linear displacement ρ . When these variances σ_p^2 are big the radius of laser beam r has to be big enough to satisfy Eq. (1). If r_{min} is the minimal value of the laser beam radius that satisfy Eq. (1) it can be expressed with the minimum divergence angle by relation

$$r_{min} = \theta_{min} \cdot Z. \quad (5)$$

Having used Eqs. (1), (3), (4) and (5) can be achieved following biquadrate equation

$$\theta_{min}^4 + 8 \frac{\sigma_p^2}{Z^2} \cdot \theta_{min}^2 - \frac{1024 \cdot \sigma_p^4 \cdot [\operatorname{erfcinv}(2BER)]^4}{Z^4 \cdot (1 + 16[\operatorname{erfcinv}(2BER)]^2)} = 0. \quad (6)$$

Only one solution of this equation is positive and from it is obtained the final expression for minimum divergence angle

$$\theta_{min} = \frac{2\sigma_p}{Z} \sqrt{\frac{8[\operatorname{erfcinv}(2BER)]^2 + 1}{\sqrt{16[\operatorname{erfcinv}(2BER)]^2 + 1}}} - 1. \quad (7)$$

This equation can be used to calculate minimal angle of laser beam divergence that satisfy domain of power design problem, when the statistic of laser beam direction fluctuation is known and some value of BER has to be achieved.

III. NUMERICAL RESULTS AND DISCUSION

The obtained expression for θ_{min} is used for an example calculation. The results are given on Fig. 2 for $Z=3000$ m and $\sigma_p=0,3$ m – weak mechanical vibrations and weak turbulence,

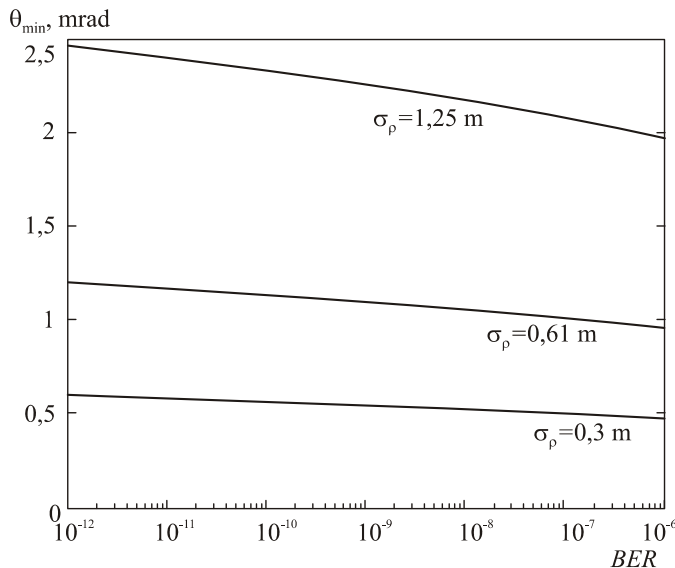


Fig.2. Dependence of minimum divergence angle on Bit-Error Rate for various values of σ_p and $Z=3000$ m

$\sigma_p=0,61$ m – middle vibrations and turbulence, and $\sigma_p=1,25$ m – very strong mechanical vibrations and turbulence.

The nature of the graphs in Fig. 2 is quite expected. When the turbulence and mechanical vibration caused big variances of the laser shape in the receiver's plane the FSO system needs laser beam with bigger divergence to satisfy domain of the power design problem. In this case for Bit-Error Rates from 10^{-12} to 10^{-6} , that are interesting for the practice, the minimum divergence angle varies with approximately 20 % between 2,5 and 2 mrad. When the linear deviation of laser shape is smaller – $\sigma_p=0,3$ m and $\sigma_p=0,61$ m – the variation of θ_{min} is smaller too.

IV. CONCLUSIONS

An expression of minimum laser beam divergence angle that satisfy the domain of the FSO power design problem is obtained in this paper. It can be used when the power parameter of the system are calculated for the proper choice of the laser source.

REFERENCES

- [1] Sh. Arnon, "Effects of atmospheric turbulence and building sway on optical wireless-communication system", Optics Letters, Vol.28, No. 2, pp. 129–131, January 2003.
- [2] H. Sandalidis, Th. Tsiftsis, G. Karagiannidis, and M. Uysal, "BER performance of FSO links over strong atmospheric turbulence channels with pointing errors", IEEE Communications Letters, Vol. 12, No. 1, pp. 44-46, January 2008.
- [3] H. Nistazakis, T. A. Tsiftsis, and G. Tombras, "Performance analysis of free-space optical communication systems over atmospheric turbulence channels," IET-Communications, vol. 3, No. 8, pp.1402 - 1409, August 2009.
- [4] Ts. Mitsev, K. Dimitrov, H. Ivanov, and N. Kolev, "Optimum divergence of laser radiation in FSO systems", Proceedings in 7-th International Conference on Communications, Electromagnetics and Medical Applications - CEMA'12, Athens, Greece, pp. 42-45, November 2012.
- [5] N. Kolev and Ts. Mitsev, "Implementation of pseudo random noise generator in FPGA for free space optics BER testing", Proceedings of ICEST'2012, Veliko Tarnovo, Bulgaria, Vol. 1, pp. 33 – 36, June 2012.
- [6] B. Pachedjieva, E. Ferdinandov, B. Bonev, and Sl. Saparev, "Influence of the transmitters antenna mechanical vibrations on bit-error rate in ground-to-ground free-space laser communication systems", E+E, Vol. 3-4, pp. 25-29, 2007, in Bulgarian.
- [7] B. Pachedjieva, "Influence of the atmospheric turbulence on bit-error rate in ground-to-ground free-space laser communication systems", E+E, Vol. 3-4, pp. 41-44, 2007, in Bulgarian.
- [8] B. Bonev, "Relative influence of some stochastic factors on bit-error rate of ground-to-ground free space optics", Proc. of ICEST 2007, Ohrid, Macedonia, Vol. 1, pp. 203 – 206, June 2007.
- [9] E. Ferdinandov and B. Pachedjieva, "Formation of bit-error rate in the free-space laser communication systems – methods of research", E+E, Vol. 9-10, 2006, pp. 12-16, in Bulgarian.
- [10] B. Bonev, "Influence of Random Fluctuations of Laser Beam Propagation Direction on FSO Power Design", Proc. of COMITE'2013, Pardubice, Czech Republic, April 2013. in print