

Reception of DVB-T Signals: Peculiarities and Problems

Oleg Borisov Panagiev

Abstract – This paper presents the results from the measurements of the influence of the differences in the polarization between Tx and Rx antennas by DVB-T broadcasting. Considered are the cases of directional and omnidirectional antenna for Ricean and Rayleigh channels. Comparisons are made with the standard requirements of ETSI and the experimental results are presented through graphical interpretations.

Keywords – DVB-T, BER, C/N, Ricean and Rayleigh channels.

I. INTRODUCTION

This paper covers an investigation of the influence of the change in polarization of the electromagnetic waves by reception of DVB-T signals with a directional (log-periodic LP-21) and an omnidirectional (monopole) antenna in urban and rural conditions, by which are received direct as well as reflected signals. According to the standard [1] these are the cases of Ricean and Rayleigh channels, whose mathematical descriptions are presented with the distributions of Rice and Rayleigh.

Fig. 1 (right side) shows the case of reception of DVB-T signals in urban conditions, where there are lot of buildings with different emplacement and height. The antennas can be mounted on different sides of the building, different floors or on the roof, whereat part of them will receive directed signal (Gaussian channel) or directed and reflected signals with

directed and undirected antenna (Ricean and Rayleigh channel). In Fig. 1 (left side) is presented the case of reception of DVB-T signals with the use of directional and omnidirectional antennas in rural environment, where the buildings are small and spread [2, 3, 4].

In both cases the reception of signals is implementable with the already aforementioned antennas with vertical and/or horizontal polarization. There are different reasons use reception of broadcasted with vertical polarization signals with antennas installed for horizontal polarization and vice versa.

Furthermore, it is known that in the case of reflections, under certain conditions, the polarizations of the broadcasted signal changes in the place of reception [5]. Also, when the antenna is installed, it is possible that the antenna is not oriented for horizontal or vertical polarization, but has a displacement in left or right in relation to the vector of the electric field. This displacement can range from few degrees to several tens of degrees in the vertical or horizontal plane, whereat signals broadcasted with vertical polarization are received with antenna oriented for reception of signals that have neither horizontal nor vertical polarization. By the suggested methodology for investigation are also considered the reception with one antenna for vertical polarization of local programs and transboundary reception of signals with horizontal polarization (without rotating the antenna), as well as the influence of other radiocommunication systems: LTE, WiMax, DTT, etc. [6, 7, 8].

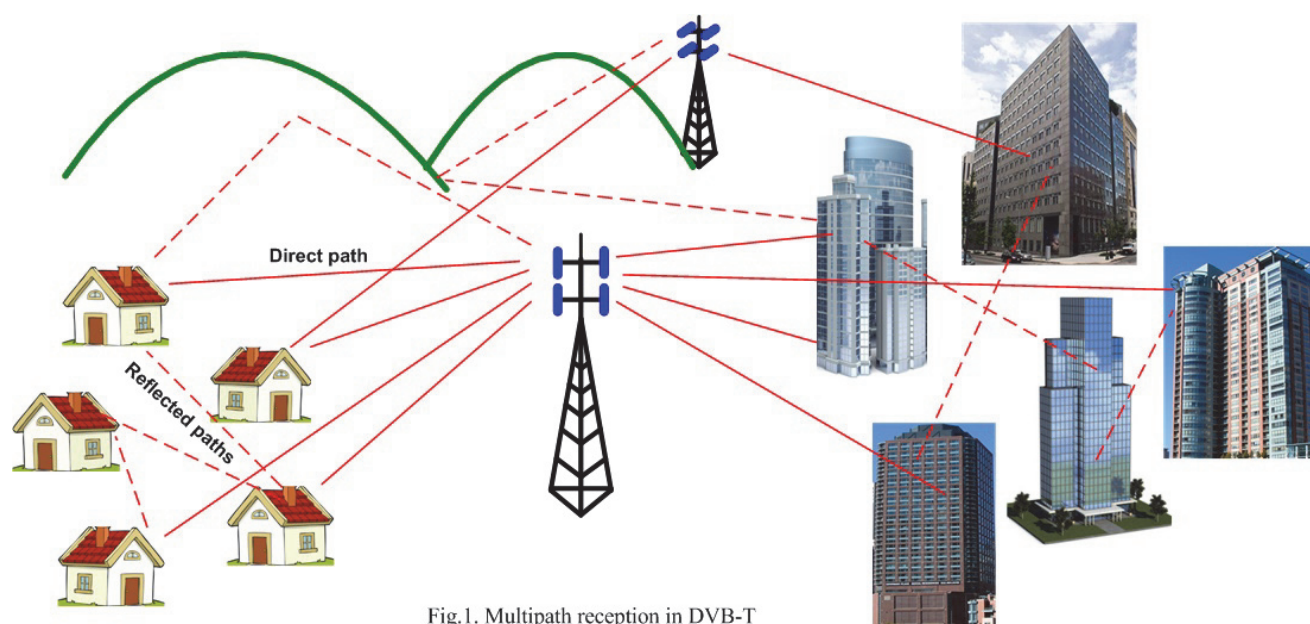


Fig.1. Multipath reception in DVB-T

II. MATHEMATICAL RELATIONSHIPS

The reception of DVB-T signals is accompanied with a variety of specifics and difficulties, as essential are the influence of the carrier-to-noise ratio, which is different for the different modulation of the carrier signals, different degrees of the convolution code, as it is also dependent on the type of the connection channel. According to [1], by television reception there are three types of connection channels distinguished:

a) *Gaussian channel* - characterized with the reception of the broadcasted directed signal from the transmitter, through directed reception antenna. In this case, the mathematical description of the connection channel is presented by Gaussian distribution, respectively AWGN noise.

b) *Ricean channel* – characterized with a reception, with the use of directed reception antenna, when there are reflected signals. The mathematical description (modeling) of this connection channel is presented by Rice distribution:

$$y(t) = [\rho_o x(t) + \sum_{i=1}^N \rho_i e^{-j\theta_i} x(t - \tau_i)] / \sqrt{\sum_{i=0}^N \rho_i^2}, \quad (1)$$

where:

- the first term before the sum represents the line of sight ray;
- N is the number of echoes equal to 20;
- θ_i is the phase shift from scattering of the i 'th path;
- ρ_i is the attenuation of the i 'th path;
- τ_i is the relative delay of the i 'th path.

The Ricean factor K (the ratio of the power of the direct path (the line of sight ray) to the reflected paths) is given as:

$$K = \rho_o^2 / \sum_{i=1}^N \rho_i^2 \quad (2)$$

A Ricean factor $K = 10$ dB has been used in the simulations. In this case:

$$\rho_o = [10 \sum_{i=1}^N \rho_i^2]^{1/2} \quad (3)$$

c) *Rayleigh channel* – characterized with receiving via omnidirectional receiver antenna (dipole/monopole) at the presence of reflected signals. The mathematical description is being presented by a Rayleigh distribution:

$$y(t) = k \sum_{i=1}^N \rho_i e^{-j\theta_i} x(t - \tau_i), \quad (4)$$

where $k = 1 / [\sum_{i=1}^N \rho_i^2]^{1/2}$.

In Table 1 are presented the minimal allowed (limit) values of the carrier-to-noise ratio for a non-hierarchical modulation for $BER = 2 \cdot 10^{-4}$ after a Viterbi decoding and Quasi Error Free (QEF) receiving after the Read Solomon decoder [1, 9].

The carrier-to-noise ratio that is needed at the place of receiving depends on the Effective Radiated Power (ERP)

TABLE 1
THE MINIMAL ALLOWED (LIMIT) VALUES OF THE C/N

Modulation	Code rate	Required C/N for BER = 2×10^{-4} after Viterbi QEF after Reed-Solomon		
		Gaussian channel	Ricean channel	Rayleigh channel
16-QAM	1/2	8,8	9,6	11,2
16-QAM	2/3	11,1	11,6	14,2
16-QAM	3/4	12,5	13,0	16,7
16-QAM	5/6	13,5	14,4	19,3
16-QAM	7/8	13,9	15,0	22,8
64-QAM	1/2	14,4	14,7	16,0
64-QAM	2/3	16,5	17,1	19,3
64-QAM	3/4	18,0	18,6	21,7
64-QAM	5/6	19,3	20,0	25,3
64-QAM	7/8	20,1	21,0	27,9

from the transmitter. In many cases though, the maximal ERP is limited by the possible interference with the existing radio transmitters of other signals. Hereof there is a research made on the dependence of BER and the carrier-to-noise ratio from the intensity E of the field at the place of receiving.

The intensity E of the electromagnetic field at the place of the antenna mount is defined/calculated according to the expression [10]:

$$E \text{ [dB } \mu\text{V/m]} = U + 6 - (G + \lambda_{dB} + k), \quad (5)$$

where U is the level of the DVB-T signal at the place of the measurement (at the input of the level strength meter); G is the gain by voltage of the antenna (dB); $k \text{ [dB]} = -\ell \cdot a$, where ℓ is the length of connecting coaxial cable and a is its attenuation for 100m at a given frequency; $\lambda \text{ [m]} = c/f$, and $c = 300\,000 \text{ km/s}$ is the speed of light in vacuum and f is the carrier frequency for the relevant television channel ($f \approx f_c$).

III. EXPERIMENTAL RESULTS

On 01.10.2013 in Bulgaria the aerial transmission of television channels was fully switched to DVB-T, and the polarization of the signals from the multiplexes was changed to a vertical. The late analog television transmission used a horizontal polarization and so the antennas were oriented (mounted) for this polarization. Most of the users of this service are still using their antennas with a horizontal polarization. Few years ago, this change aroused my interest to research the characteristics of this type of emitting and receiving a DVB-T signal from different multiplexes – local and remote (Table 2). The measurements were made with pointed antenna with a direct receiving and receiving of reflected signals. Later the research was broadened by conducting the measurements with omnidirectional antenna (monopole). Unfortunately, due to the deactivation (suspension of the transmission) of most multiplexes in the region of Sofia, only the channels 27, 40 and 49 were left. Since the transmitter of ch. 49 is more than 40 kilometers away from the place, where the measurements took place, the intensity E of the electromagnetic field is low. By receiving

TABLE 2
THE CHARACTERISTICS OF DVB-T SIGNALS

TV channel	f_c , MHz	U, dB μ V			
		Gaussian		Ricean	
		H	V	V	H
23	490	56	53	55,7	45
32	562	30	36,6	33,5	<20
40	626	49,6	38,6	55	43,6
49	698	29,6	<26	38,4	<22
52	722	49	37,9	54,3	43,1
53	730	30,9	<23	28,6	<19
64	818	37,2	41,3	42,9	35

the signal trough both antennas, there is not enough level and quality of the DVB-T signal, so this makes it's modelling via Ricean and Rayleigh channel impossible.

The presented results are for the experiments, made with two antennas (directional and omnidirectional), receiving channels 27 and 40 of the UHF band. The parameters of the received channels are presented in Table 3. The measurements are made for the two most severe cases: Ricean and Rayleigh channel. Because the broadcasting of DVB-T signals is with a vertical polarization, the change of the slope of the installation for each antenna starts from 0 ° to 90 ° through a 10 ° step, where the initial position shown in Fig. 2, and the polarization of the radio waves of the transmitting and receiving antennas are the same (vertical). In its end position, the antenna receives with horizontal polarization, although the transmitter does not change its polarization (vertical). In Table 4 and Table 5 are presented the result for the levels of the signals for each channel, their carrier-to-noise ratio, BER before Viterbi (CBER), after Viterbi (VBER) and MER. In Fig. 3 and Fig. 4 are presented the dependence of BER from the angle of incline of the antenna, respectively for LP-21 and monopole.

TABLE 3
THE PARAMETERS OF THE RECEIVED CHANNELS

TV channel	27	40
B, MHz	8	8
FFT mode	8 K	8 K
M-QAM	16-QAM	64-QAM
Δ (GI)	1/16	1/4
Code	2/3	2/3
Compression	MPEG-4	MPEG-4
Profile	HP@L3.0	MP@L3.0

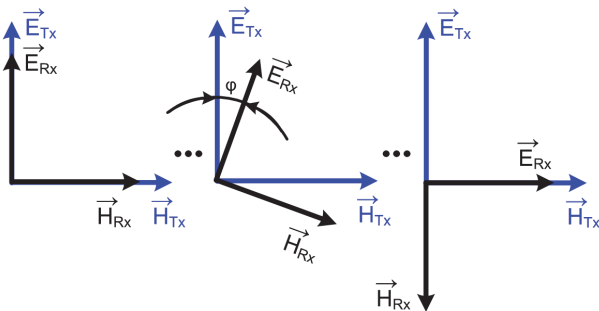


Fig. 2. Change in polarizations between Tx and Rx antennas

TABLE 4
THE RESULTS FOR LP-21

TV channel	27		40	
f_c , MHz	522		626	
Polarization	V	H	V	H
U, dB μ V	41,4	37,5	46,5	45,1
C/N, dB	15,2	11,4	19,6	18
CBER	8,1E-03	2,2E-02	2,2E-02	3,2E-02
VBER	2,3E-08	2,5E-06	3,7E-08	1,2E-07
MER, dB	17,3	15,4	21,1	19,2

TABLE 5
THE RESULTS FOR MONOPOLE

TV channel	27		40	
f_c , MHz	522		626	
Polarization	V	H	V	H
U, dB μ V	36,9	38,3	41,0	40,4
C/N, dB	10	11,9	14	12,6
CBER	2,0E-02	1,5E-02	5,6E-02	6,9E-02
VBER	2,8E-07	8,5E-08	1,8E-05	1,2E-04
MER, dB	15,5	16,5	16,6	16,5

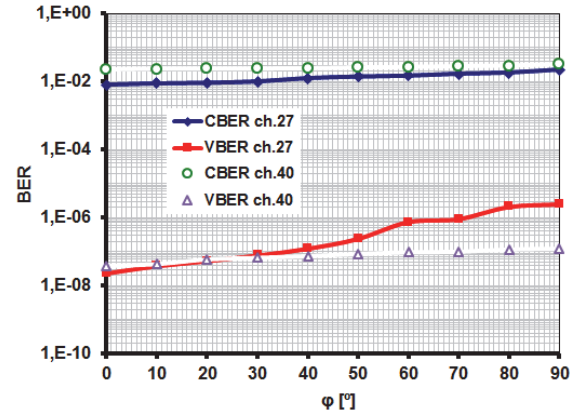


Fig. 3. $BER = func(\varphi)$ – Ricean channel (LP-21)

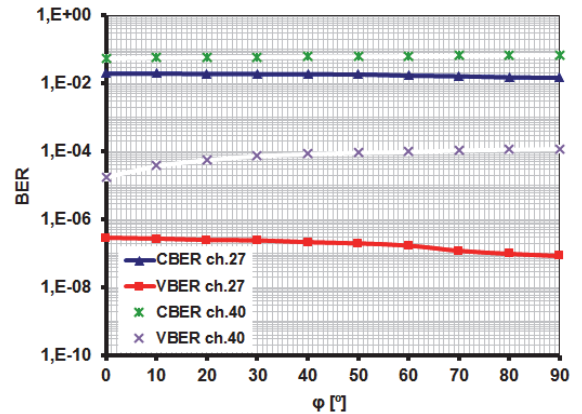


Fig. 4. $BER = func(\varphi)$ – Rayleigh channel (monopole)

In Table 6 (LP-21) and Table 7 (monopole) are presented the values for carrier-to-noise (C/N) ratio from the intensity E of the electromagnetic field at the point of receiving by different angles of incline (angle of rotation). The graphic interpretation is shown on Fig. 5. In the obtained values for the intensity E of the electromagnetic field are considered the parameters of the connecting coaxial cables, the gain of the

TABLE 6
C/N AND E FOR LP-21

TV channel	27		40	
f_c MHz	522		626	
Polarization	V	H	V	H
E, dB μ V/m	50,43	46,53	57,18	55,78
C/N, dB	15,2	11,4	19,6	18

TABLE 7
C/N AND E FOR MONOPOLE

TV channel	27		40	
f_c MHz	522		626	
Polarization	V	H	V	H
E, dB μ V/m	57,96	59,46	63,73	63,13
C/N, dB	10	11,9	14	12,6

antennas, the levels of the signals and the wave length of every channel.

Constellation diagrams are presented in Fig. 6.



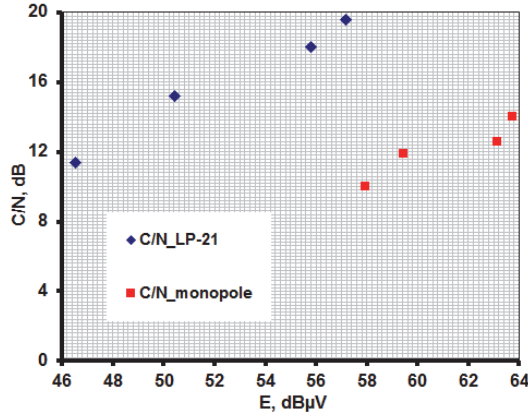


Fig. 5. $C/N = func(E)$

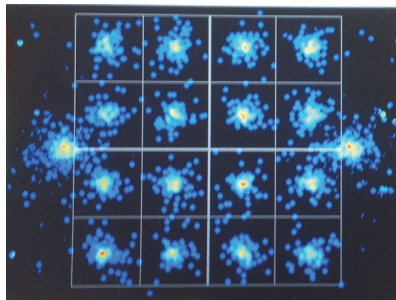

(a) Ricean channel

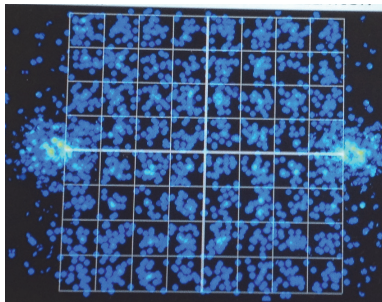

(b) Rayleigh channel

Fig. 6. Constellations

IV. CONCLUSION

By comparison of the obtained results for the two channels, received with directional and omnidirectional antennas, it is to be seen, that the data presented in table and graphic type allow the following conclusions to be made:

- C/N ratio by directional antenna is in the permissible limits according to the standard ETSI (Table 1) for the two television channels with Gaussian and Ricean channels;
- C/N ratio by omnidirectional antenna is between 4dB and 5dB lower than the values of the standard ETSI (Table 1) for the two television channels with Rayleigh channel;
- For ch.27, when using a monopole antenna, the levels at horizontal polarization/position are higher than those at vertical because of the shift of the polarization from vertical to horizontal, as a result of the reflection from the buildings; the frequency is lower than this of channel 40 and the lower guard interval 1/16.

REFERENCES

- [1] ETSI EN 300 744 V1.4.1 (2001-01), European Standard, Digital Video Broadcasting (DVB); Framing Structure, Channel Coding and Modulation for DTT, ETSI, 2001.
- [2] A. Arifuzzaman, M. Saleh, M. Tarique, and R. Islam. "Effects of Filters on DVB-T Receiver Performance under AWGN, Rayleigh and Ricean Fading Channels", *IJCNC*, vol. 5, no. 4, pp. 87-101, 2013.
- [3] L. Polák, and T. Kratochvil, "DVB-T/H Digital Television Transmission and its Simulation over Ricean and Rayleigh Fading Channels", *Elektrorevue*, vol. 12, no. 6, pp. 74-1-74-7, 2010.
- [4] V.P. Kalogirou, T. H.N. Velivasaki, and C.N. Capsalis, "Performance Measurements of a DVB-T System Affected by 5-MHz Generic Adjacent Channel Interference", *Progress in Electromagnetics Research C*, vol. 17, pp. 1-15, 2010.
- [5] I. Poole, "Antenna Polarisation or Polarization", www.radio-electronics.com
- [6] Annex A: UHF Technical Compatibility Issues, Aegis Systems Limited, 2006.
- [7] S. Sadinov, P. Daneva, and P. Kogias, "Description and Simulation of OFDM Reception Process", *Journal of Engineering Science and Technology Review*, Kavala, Greece, vol. 7, issue 3, pp. 18-22, 2014.
- [8] T. Todorova-Sokolova, "Engineering in Public Administration", *Journal of Multidisciplinary Engineering Science and Technology (JMEST)*, vol. 3, no. 5, pp. 4884-4887. Retrieved from <http://www.jmest.org/vol-3-issue-5-may-2016/JMESTN42351607>, 2016.
- [9] K. Konov, *Digital Radio and Television Broadcasting*, Dios, S., 2010.
- [10] O.B. Panagiev, *Handbook for Laboratory Exercises in Radio and Television Systems and Networks*, Sofia, Publishers of Technical University of Sofia, 2010.